



## CONTENTS

|   |          |
|---|----------|
| <b>1. SCOPE.....</b>                                    | <b>3</b> |
| <b>2. PROCESS CONDITION .....</b>                       | <b>3</b> |
| <b>3. GAS USED FOR THE TEST .....</b>                   | <b>3</b> |
| <b>4. BEARING CONDITIONS.....</b>                       | <b>3</b> |
| <b>5. ANNEXES.....</b>                                  | <b>3</b> |
| 5.1 THRUST BEARING TEST, LOW SPEED .....                | 4        |
| 5.2 THRUST AND JOURNAL BEARINGS TEST, HIGHT SPEED ..... | 5        |
| 5.3 THRUST AND JOURNAL BEARING TEST,HIGH SPEED .....    | 6        |
| 5.4 CRITICAL SPEEDS AND SHAFT VIBRATIONS .....          | 7        |
| 5.5 OVERSPEED TEST .....                                | 8        |
| 5.6 COOL DOWN, START-UP AND SHUT-DOWN .....             | 9        |
| 5.7 EFFICIENCY VERSUS U1/CO.....                        | 11       |

## **1. SCOPE**

This report is a summary of the tests of a Cryogenic turbo-expander cartridge, performed on DTA test bed according to the procedure D4444-PO-2.

## **2. PROCESS CONDITION**

The data sheet in appendix gives the turbine process conditions specified by the customer.

## **3. GAS USED FOR THE TEST**

Helium

Nitrogen

## **4. BEARING CONDITIONS**

The diagrams in appendix give the gas bearing conditions :

- to be applied on site,
- to be applied during the test.

## **5. ANNEXES**

TESTS REPORTS

## TEST REPORT

### 5.1 THRUST BEARING TEST, LOW SPEED

(Items 6.1 of procedure)

Cartridge number: C7 509 HG<sub>1</sub>

Bearing conditions required: NORMAL

| CASE  | EXTREME 1 | EXTREME 2 |                    |
|---|-----------|-----------|--------------------|
| INPUTS                                      |           |           |                    |
| Load  | 0         | 1233      | N                  |
| On  | Brake     | Turbine   | Bearing            |
| Equivalent pressure difference on the shaft | 0         | 19        | 10 <sup>5</sup> Pa |
| OUTPUTS                                     |           |           |                    |
| Inlet bearing pressure                      |           | 17.88     | 10 <sup>5</sup> Pa |
| Outlet bearing pressure                     |           | 2.94      | 10 <sup>5</sup> Pa |
| Turbine outlet pressure<br>(1)              |           | 2.98      | 10 <sup>5</sup> Pa |
| Brake pressure<br>(2)                       |           | 17.27     | 10 <sup>5</sup> Pa |
| Pressure difference =<br>(2) – (1)          |           | 14.29     | 10 <sup>5</sup> Pa |
| Speed                                       |           | 7         | Hz                 |
| Passed/failed                               |           | passed    |                    |

**TEST REPORT**

**5.2 THRUST AND JOURNAL BEARINGS TEST, HIGH SPEED**

(Items 6.2 of procedure)

Cartridge number: C7 509 HG<sub>1</sub>

Bearing conditions required: NORMAL

| <b>MODE</b>                        | <b>MINIMAL</b> | <b>NOMINAL</b> | <b>MAXIMAL</b> |                    |
|------------------------------------|----------------|----------------|----------------|--------------------|
| <b>INPUTS</b>                      |                |                |                |                    |
| Turbine outlet design pressure (1) | 5.7            | 4.9            | 3.5            | 10 <sup>5</sup> Pa |
| Brake design pressure (2)          | 11.2           | 14             | 16.8           | 10 <sup>5</sup> Pa |
| $\Delta = 2-1$                     | 5.5            | 9.1            | 13.3           | 10 <sup>5</sup> Pa |
| <b>OUTPUTS</b>                     |                |                |                |                    |
| Inlet bearing pressure             | 17.62          |                |                | 10 <sup>5</sup> Pa |
| Outlet bearing pressure            | 2.28           |                |                | 10 <sup>5</sup> Pa |
| Turbine outlet test pressure (1)   | 2.6            |                |                | 10 <sup>5</sup> Pa |
| Brake test pressure (2)            | 4.05           |                |                | 10 <sup>5</sup> Pa |
| $\Delta = (2) - (1)$               | 1.45           |                |                | 10 <sup>5</sup> Pa |
| Speed                              | 914            |                |                | Hz                 |
| Passed/failed                      | passed         |                |                |                    |

**TEST REPORT**

**5.3 THRUST AND JOURNAL BEARING TEST, HIGH SPEED**

(Items 6.2 of procedure)

Cartridge number: C7 509 HG<sub>1</sub>

Bearing conditions required: ALARM AND STOP

| <b>BEARING CONDITIONS</b>          | <b>ALARM</b> | <b>STOP</b> |                    |
|------------------------------------|--------------|-------------|--------------------|
| Mode                               | Nominal      | Nominal     |                    |
| <b>INPUTS</b>                      |              |             |                    |
| Turbine design outlet pressure (1) | 4.9          | 4.9         | 10 <sup>5</sup> Pa |
| Brake design pressure (2)          | 14           | 14          | 10 <sup>5</sup> Pa |
| $\Delta = 2-1$                     | 9.1          | 9.1         | 10 <sup>5</sup> Pa |
| <b>OUTPUTS</b>                     |              |             |                    |
| Inlet bearing pressure             |              | 17.62       | 10 <sup>5</sup> Pa |
| Outlet bearing pressure            |              | 2.28        | 10 <sup>5</sup> Pa |
| Turbine outlet test pressure       |              | 2.6         | 10 <sup>5</sup> Pa |
| Brake outlet pressure              |              | 4.05        | 10 <sup>5</sup> Pa |
| $\Delta = 2-1$                     |              | 1.45        | 10 <sup>5</sup> Pa |
| Speed                              |              | 914         | Hz                 |
| Passed/failed                      |              | passed      |                    |

## TEST REPORT

### 5.4 CRITICAL SPEEDS AND SHAFT VIBRATIONS

(Items 6.3 of procedure)

Cartridge number: C7 509 HG<sub>1</sub>

Bearing conditions required: STOP

| INPUTS                       |                            |     |                            |     |                    |
|------------------------------|----------------------------|-----|----------------------------|-----|--------------------|
|                              | 1 <sup>st</sup> RIGID MODE |     | 2 <sup>nd</sup> RIGID MODE |     |                    |
| Calculated peak freq.        | 650                        |     | 750                        |     | H <sub>z</sub>     |
| OUTPUTS                      |                            |     |                            |     |                    |
| Measured critical speeds     | BEGIN.                     | END | BEGIN.                     | END |                    |
|                              | 600                        |     |                            | 750 | H <sub>z</sub>     |
| Sound level estimation       | B                          |     | B                          |     |                    |
| Time within the mode (> 3 ') |                            |     |                            |     | Min                |
| Inlet bearing pressure       | 17.76                      |     | 17.76                      |     | 10 <sup>5</sup> Pa |
| Outlet bearing pressure      | 2.03                       |     | 2.03                       |     | 10 <sup>5</sup> Pa |
| Passed/failed                | passed                     |     | passed                     |     |                    |

Sound level estimation:

A: Inaudible

B: Perceptible

C: Noisy

D: Excessive

**TEST REPORT**
**5.5 OVERSPEED TEST**

(Items 6.4 of procedure)

 Cartridge number: C7 509 HG<sub>1</sub>

Bearing conditions required: NORMAL

| INPUTS                                       |        |                                 |        |                                |
|--|--------|---------------------------------|--------|--------------------------------|
| Nominal speed (Hz)                           |        | Maximum speed (Hz)              |        | Over speed (Hz)                |
| 1060   |        | 1130                            |        | 1140                           |
| OUPUTS                                       |        |                                 |        |                                |
| BEARING TEST CONDITIONS                      |        |                                 |        |                                |
| BEARING GAS PRESSURE<br>(10 <sup>5</sup> Pa) |        | BEARING GAS TEMPERATURE<br>(°C) |        | BEARING GAS FLOW RATE<br>(g/s) |
| SUPPLY                                       | RETURN | SUPPLY                          | RETURN |                                |
| 18.2   | 1.33   | 15.8                            | 19.1   |                                |

**TURBINE TEST CONDITIONS**

|  |        |                            |        |                            |
|--|--------|----------------------------|--------|----------------------------|
| TURBINE PRESSURE<br>(10 <sup>5</sup> Pa) |        | TURBINE TEMPERATURE<br>(K) |        | TURBINE FLOW RATE<br>(g/s) |
| SUPPLY                                   | RETURN | SUPPLY                     | RETURN |                            |
| 10.21                                    | 3.21   | 241.27                     | 195.14 |                            |

**BRAKE TEST CONDITIONS**

|  |                                |
|--|--------------------------------|
| INLET BRAKE PRESSURE<br>10 <sup>5</sup> Pa | OUTLET BRAKE TEMPERATURE<br>°C |
| 3.44                                       | 61.3                           |

**TEST RESULTS**

| ROTATION SPEED H <sub>z</sub> | STEADY STATE | OVERSPEED STATE DURATION (mn) | COMMENTS |      |
|-------------------------------|--------------|-------------------------------|----------|------|
|                               |              |                               | FAIL     | PASS |
| 1151                          | A            | 3                             |          | X    |

Steady state evaluation:

A: Stable

B: Noisy

C: Unstable

## TEST REPORT

### 5.6 COOL DOWN, START-UP AND SHUT-DOWN

(Items 6.5 and 6.6 of procedure)

Cartridge number: C7 509 HG<sub>1</sub>

Bearing conditions required: normal

Nominal speed:

|                              | AMBIENT      | MEDIUM       | +10% K       | NOMINAL      | - 10%  |                    |
|------------------------------|--------------|--------------|--------------|--------------|--------|--------------------|
| Target outlet temperature    | 250          | 240          | 225          | 99           | 90     | K                  |
| <b>TURBINE :</b>             |              |              |              |              |        |                    |
| Inlet pressure               |              | 6.0          | 7.56         | 6.07         | 6.83   | 10 <sup>5</sup> Pa |
| Outlet pressure              |              | 2.26         | 2.6          | 2.63         | 2.96   | 10 <sup>5</sup> Pa |
| Inlet temperature            |              | 276.58       | 258.6        | 117.2        | 109.68 | K                  |
| Outlet temperature           |              | 238.12       | 220.07       | 98.86        | 90.04  | K                  |
| Flow                         |              | 114.7        | 149.2        | 170.9        | 200.7  | g/s                |
| U1/C0                        |              | 0.25         | 0.28         | 0.41         | 0.46   |                    |
| μ                            |              | 43.18        | 43.14        | 55.31        | 63.24  | %                  |
| <b>BRAKE :</b>               |              |              |              |              |        |                    |
| Inlet pressure               |              | 3.72         | 4.05         | 3.17         | 2.97   | 10 <sup>5</sup> Pa |
| Outlet temperature           |              | 31.8         | 41.9         | 34.7         | 43.0   | °C                 |
| <b>BEARING :</b>             |              |              |              |              |        |                    |
| Inlet pressure               |              | 17.76        | 17.62        | 17.73        | 17.79  | 10 <sup>5</sup> Pa |
| Outlet pressure              |              | 2.03         | 2.28         | 2.44         | 2.77   | 10 <sup>5</sup> Pa |
| Inlet temperature            |              | 16.4         | 16.5         | 17.2         | 17.7   | °C                 |
| Outlet temperature           |              | 17.0         | 17.3         | 13.1         | 10.3   | °C                 |
| Inlet flow                   |              | 34.05        | 34.53        | 32.86        | 33.44  | g/s                |
| <b>SPEED :</b>               |              | 824          | 914          | 822          | 888    | Hz                 |
| Number of start up/shut down | <del> </del> | <del> </del> | <del> </del> | <del> </del> | 3      |                    |
| Fail/pass                    |              | passed       | passed       | passed       | passed |                    |


AFFAIRE / JOB : RHEA

N° : 301 0914

Identification du matériel / Material identification : C7 509 HG<sub>1</sub>

APPLICATION :  Site Client/Customer

ALAT Test

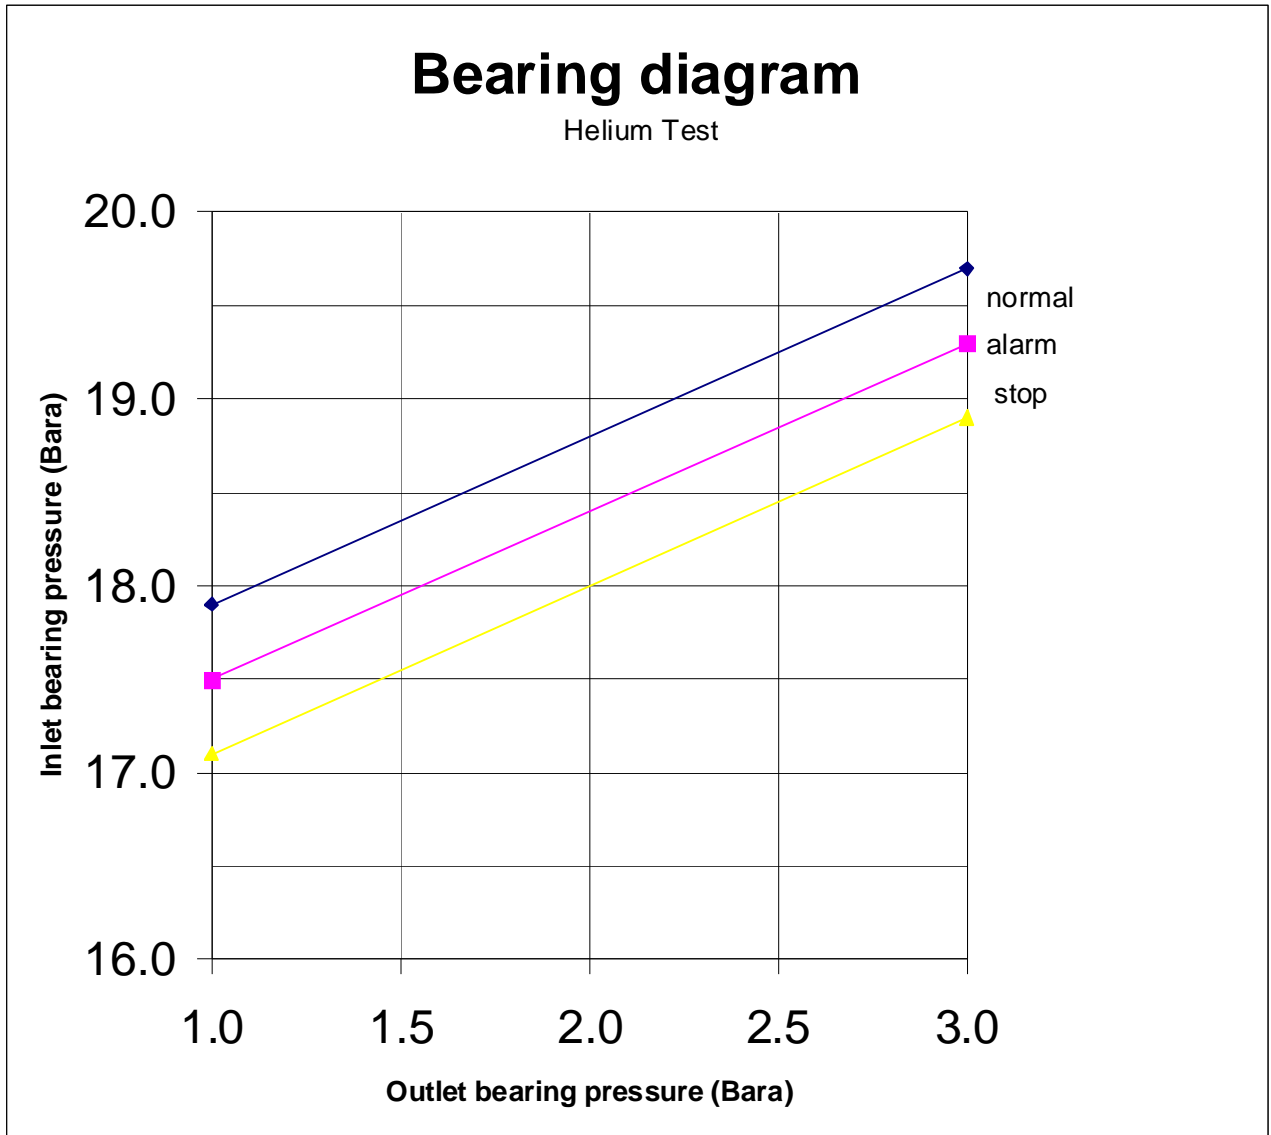

## TEST REPORT

### 5.7 EFFICIENCY VERSUS U1/CO

(Items 6.7 of procedure)

Cartridge number: C7 509 HG<sub>1</sub>

#### INPUTS

#### TURBINE PROCESS CONDITIONS

| GAS | PRESSURES<br>10 <sup>5</sup> Pa |        | TEMPERATURES<br>K |        | FLOW<br>kg/s<br>10 <sup>-3</sup> | ENTHALP. DROP<br>kJ/kg |               | $\eta$<br>$\Delta_{Hr} / \Delta_{Hs}$ | ROTATION<br>SPEED<br>Hz | REFRIG.<br>POWER<br>Watt | INLET<br>WHEEL<br>PRESS.<br>10 <sup>5</sup> Pa |
|-----|---------------------------------|--------|-------------------|--------|----------------------------------|------------------------|---------------|---------------------------------------|-------------------------|--------------------------|--|
|     | INLET                           | OUTLET | INLET             | OUTLET |                                  | $\Delta_{Hs}$          | $\Delta_{Hr}$ |                                       |                         |                          |  |
| He  | 12.16                           | 4.87   | 128.2             | 99.3   | 1166                             | 206.3                  | 152.7         | 0.74                                  | 1060                    | 178026                   | 7.35   |

#### OUTPUTS

#### TURBINE TEST CONDITIONS

| GAS | PRESSURES<br>10 <sup>5</sup> Pa |        | TEMPERATURES<br>K |        | FLOW<br>kg/s<br>10 <sup>-3</sup> | ENTHALP. DROP<br>KJ/kg |               | $\eta$<br>$\Delta_{Hr} / \Delta_{Hs}$ | ROTATION<br>SPEED<br>Hz | REFRIG.<br>POWER<br>Watt | INLET<br>WHEEL<br>PRESS.<br>10 <sup>5</sup> Pa |
|-----|---------------------------------|--------|-------------------|--------|----------------------------------|------------------------|---------------|---------------------------------------|-------------------------|--------------------------|--|
|     | INLET                           | OUTLET | INLET             | OUTLET |                                  | $\Delta_{Hs}$          | $\Delta_{Hr}$ |                                       |                         |                          |  |
| He  | 7.29                            | 3.17   | 106.57            | 87.17  | 218.2                            | 158.2                  | 102.14        | 64.57                                 | 897                     | 22288                    | 3.92   |

#### BEARING TEST CONDITIONS

| GAS | PRESSURES<br>10 <sup>5</sup> Pa |        | TEMPERATURES<br>°C |        |
|-----|---------------------------------|--------|--------------------|--------|
|     | INLET                           | OUTLET | INLET              | OUTLET |
| He  | 17.76                           | 2.95   | 17.8               | 9.5    |

#### BRAKE TEST CONDITIONS

| GAS | PRESSURES<br>10 <sup>5</sup> Pa |        | TEMPERATURES<br>°C |        |
|-----|---------------------------------|--------|--------------------|--------|
|     | INLET                           | OUTLET | INLET              | OUTLET |
| He  | 3.09                            |        |                    | 44.5   |

#### TEST RESULTS

| WHEEL<br>DIAM.<br>mm | TIP<br>VELOCITY<br>U <sub>1</sub> m/s | SPOUTING<br>VELOCITY<br>C <sub>0</sub> m/s | U <sub>1</sub> / C <sub>0</sub> | $\eta$<br>% | COMMENTS |      |
|----------------------|---------------------------------------|--|---------------------------------|-------------|----------|------|
|                      |                                       |  |                                 |             | FAIL     | PASS |
| 94.0                 | 264.76                                | 562.47                                     | 0.47                            | 64.5        |          | X    |

#### UTILITY FLOW RATE

| GAS<br>BEARING<br>SUPPLY<br>g / s | BRAKE<br>SUPPLY<br>g / s | SEAL GAS<br>g / s | RETURN<br>g / s |
|-----------------------------------|--------------------------|-------------------|-----------------|
| 33.66                             | 0.03                     | 0.22              | 36.23           |